

Type:	
Model:	
Project:	

SPECIFICATION SHEET

MODEL: BB-02 PATH LED

SPECIFICATIONS

HOUSING:

Copper, Oxidized Bronze Finish Available

SOCKET/LAMP HOLDER:

One ceramic bi-pin socket with stainless steel spring.

I FNS:

Clear tempered glass convex lens.

LAMP TYPE:

3-watt LED Slugger

MOUNTING:

Threaded base. Adjustable shield included

WIRING

Prewired with 5' pigtail of 18/2 cable.

WARRANTY:


Lifetime.






Our "big stick" fixture can be used as a directional path light onto paths or steps where space is limited. The slim design allows landscape friendly installations in multiple landscape designs, and is available in custom lengths for placement in high grasses.

DIMENSIONS:



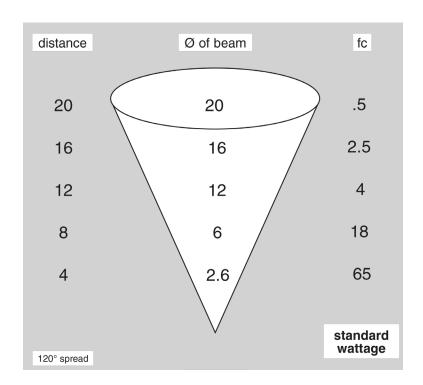



LED LAMP SPECIFICATIONS

LAMP TYPE:

MR16 UL-listed (E353116) 12V lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 60°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K=ultra-warm; 3000K=warm white; 4000K=neutral white; 5000K=cool white. Decorative color light options include amber, blue, green, and red.





FIXTURE		LAMP			MOUNTING		RISER
BB-02 PATH	WATTAGE	BEAM SPREAD	COLOR TEMP.	MS	Composite stake (incl.) 490029	R2	2" brass riser 490038
LED	0)4/	050 / 400 / 000	07001/ 100001/	М3	3-prong tri-stake 490030	R3	3" brass riser 490039
	2W	25° / 40° / 60°	2700K / 3000K	MY	Y-bracket surface mount 490045	R6	6" brass riser 490031
	4W	25° / 40° / 60°	2700K / 3000K	MG	Brass gutter mount 490047	R12	12" brass riser 490032
				MR	Round 3-hole surface mount 490048	R24	24" brass riser 490033
	5W	15° / 25° / 40° / 60°	2700K / 3000K	MP	PVC mounting stake 490037		
		25°	Amber / Blue / Green / Red				
	6W	25° / 40° / 60°	2700K / 3000K				
	7W	25° / 40°	2700K / 3000K / 4000K / 5000K				
		60°	2700K / 3000K				